

MILITEC LTD

BATTERY CHARGERS

Single and Multiple output battery chargers for use with the AC005 Portable Battery pack.

Mode of Operation

The chargers provide a completely automatic charging system where an initial boost charge, as indicated by the red boost LED, is provided until at least 90% of the battery's capacity has been restored, then the output is automatically switched to trickle charging with the green LED flickering before becoming steady indicating a fully charged battery. The battery may be left connected indefinitely without causing any damage.

MULTIPLE OUTPUT B225-4 SPECIFICATIONS



Weight 12 kilos

Four outputs
Each 13.8Vdc
Input 240Vac 3A

Dimensions

500mm x 300mm x 240mm
(L x W x H)

SINGLE OUTPUT B215v2 SPECIFICATIONS



Weight 2 kilos

Single output
240Vac 3A input.

Dimensions

200mm x 165mm x 105mm
(L W x H)


Militec Ltd., Unit 16, Cwm Cynon Business Park, Mountain Ash, Mid-Glam, UK. CF45 4ER
Tel: - ++44(0)1443 476849. Email: - sales@militec.co.uk www.militec.co.uk
Copyright © Militec 2021

For multiple charging of AC005 battery packs simultaneously the B225-4 can be supplied fitted to the AC200 racks.

AC200-4 Shown below;



AC005 SPECIFICATIONS

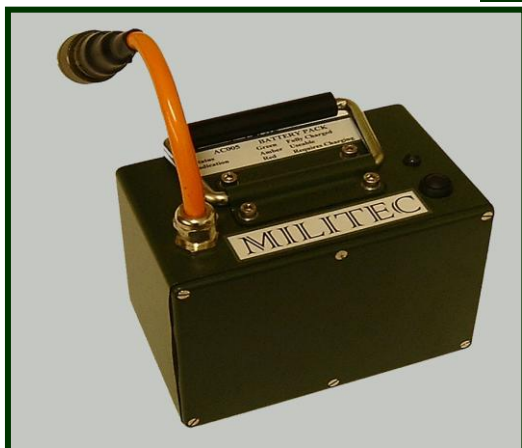

Weight

4.5 kilos

12Vdc. 13 Ahr sealed lead acid battery

Tri coloured LED provides battery status indication.

Dimensions

175mm x 120mm x 130mm (L x W x H)

Militec Ltd., Unit 16, Cwm Cynon Business Park, Mountain Ash, Mid-Glam, UK. CF45 4ER

Tel: - ++44(0)1443 476849. Email: - sales@militec.co.uk www.militec.co.uk

Copyright © Militec 2021