

MILITEC LTD

BATTERY CHARGERS

Single and Multiple output battery chargers for use with the AC005 Portable Battery pack.

MODE OF OPERATION

The chargers provide a completely automatic charging system where an initial boost charge, as indicated by the red boost LED, is provided until at least 90% of the battery's capacity has been restored, then the output is automatically switched to trickle charging with the green LED flickering before becoming steady indicating a fully charged battery. The battery may be left connected indefinitely without causing any damage.

MULTIPLE OUTPUT B225-4 SPECIFICATIONS



Weight: 12 kilos

Four outputs each 12Vdc

Input 240Vac 3A

Dimensions:

500mm x 300mm x 240mm
(L x W x H)

SINGLE OUTPUT B215V2 SPECIFICATIONS



Weight : 2 kilos

Single output 12Vdc

240Vac 3A input


Dimensions:

200mm x 165mm x 105mm
(L W x H)

For multiple charging of AC005 battery packs simultaneously the B225-4 can be supplied fitted to the AC200 racks.
AC200-4 Shown below;



AC005 SPECIFICATIONS

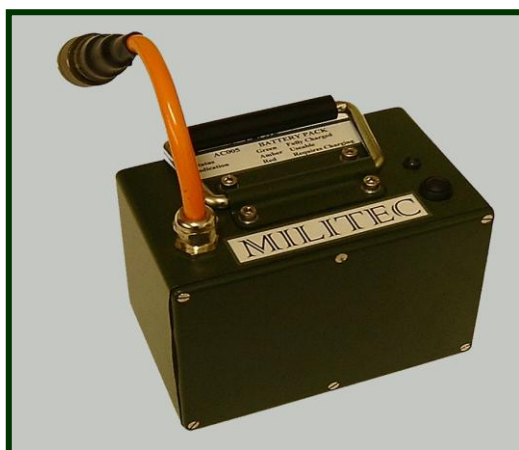

Weight: 4.5 kilos

12Vdc 12 Ahr sealed lead acid battery

Tri coloured LED provides battery status indication.

Dimensions:

175mm x 120mm x 130mm (L x W x H)