

MILITEC LTD

M1500M-2 TWO BANK TURNING TARGET FRAME



The M1500M-2 Two Bank Turning Target Frame has been designed as a low profile unit for permanent or temporary installation on a prepared range.

Used primarily for basic classification type of training.



There would be no restriction to the number of frames that can be linked together other than the range space available.

Option of line or radio control is available.

SPECIFICATIONS

WEIGHT	36 Kilos Approx.
STANDARD SIZE	1500 x 350 x 375mm (LxWxH) approx
TARGET CENTRES	Up to 1750mm.
TURN TIME	0.35 sec. (edge to face)
CONSTRUCTION	All steel construction, powder painted and stoved
PROTECTION	IP65
RADIO CONTROL	C9063RM

SCHEMATIC FOR RADIO CONTROL TURNING TARGET INSTALLATION

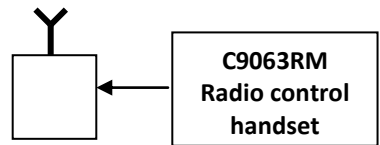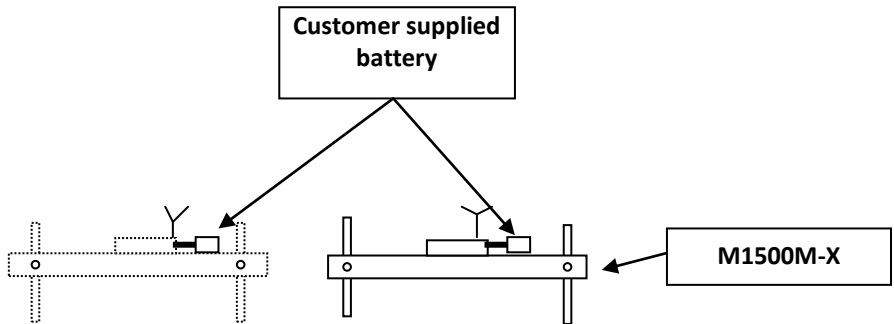

Specifications:

1. Length 210mm
- Width 100mm
- Depth 60mm
2. Weight 400 grams
3. Power, internal re-chargeable battery pack
4. Manual operation
5. Programmable on the keypad
6. 'FACE' time 1 – 999 seconds
7. 'EDGE' time 1 – 999 seconds
8. 'REPEAT' sequence 1 – 999
9. 'PAUSE' program facility