


MILITEC LTD

M4500M-F1 MOVING TARGET CARRIER

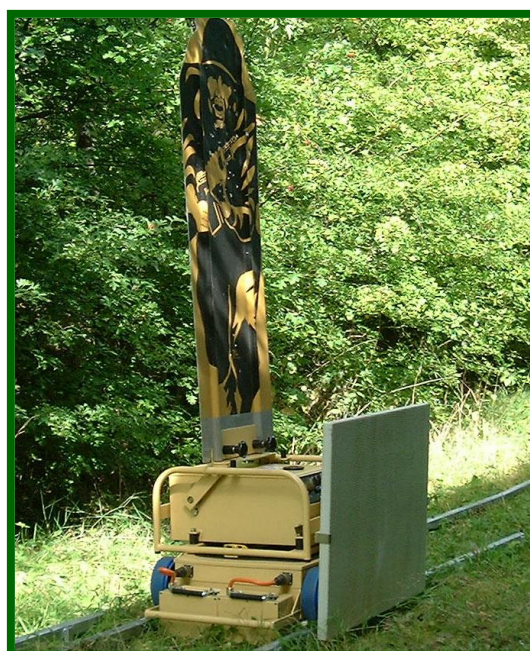

SPECIFICATIONS

SIZE	800x525x210mm
WEIGHT	26 kilos (excluding battery packs)
2.NO 12 VOLT BATTERY PACK	5 kilos each
SPEED	Up to 3 mtrs per second Selectable 4 speeds from the handset controller
RADIO CONTROLLED	C9172M or C9200M handset or control computer
CARRYING CAPACITY	Example; M3200M 31 kilos + amour panel 26 kilos
TRAVEL DISTANCE FULLY LOADED	2km
OPERATIONAL DISTANCE	Up to 1km line of sight
PROTECTION CLASSIFICATION	IP65

It is very easy to set-up a range. The ground should be reasonably flat, undulating ground is not a problem.

The rails simply slot together at an angle and laid flat in the desired position. Supplied in 1.1mtr. lengths.



The carrier is placed on the track and the two battery packs connected.



The armour panel support bracket fits into the two location tubes, when specified. Option for advancing target is also catered for with location tubes added at one end.



When the system is required to be used as an advancing target the location bar on the carrier's lid is re-positioning to accommodate the target mechanism being turn 90 degrees.